



## Step One : Setting up your Extensions



**Default Room  
(set on TS/TSW)**

**From 3.17 Panel  
shows in Setup  
App**




**Load TS/TSW Dialer to same  
room.**

**Set name temporarily to  
indicate room name.**

**Use the Intercom Controller to find you  
Crestion Panels**

**Setup the Names of each endpoint.  
Usually the room name**

**Discovery**

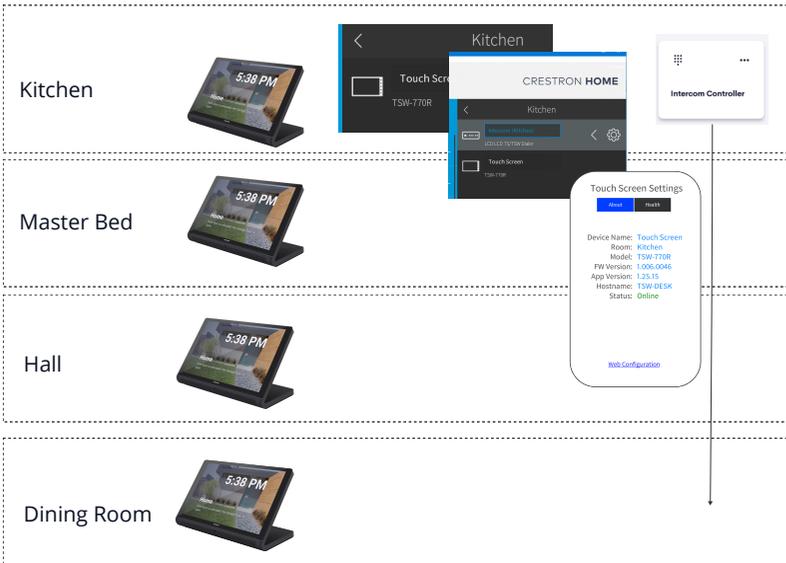

**If you are unsure about which panel is in  
which room then use the setup app to find  
the IP address by clicking on the Web  
Configuration Link.**

**If you have enabled the Group calling option  
then groups of extensions can be setup in the  
controller app.**

**If you have enabled the SIP Extensions  
feature then non crestion SIP phones and  
devices can be added to the system.**



YealinkW56H



Grandstream WP80

**NB: We recommend setting static IP Addresses or using a DHCP Mac Reservation system to ensure sip extensions are maintained over time.**